


# SLR 60

## 04-006 | Technical Data Sheet

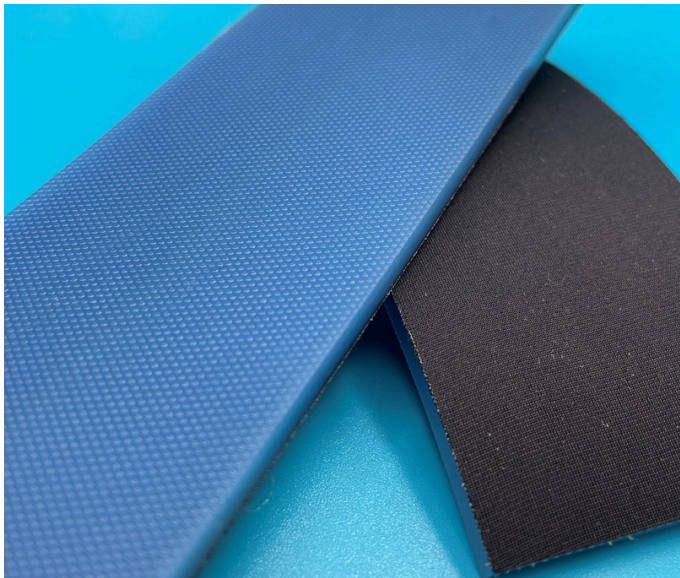

### Technical Information

Plies	1
Overall Thickness	.17"
Tensile Force	342# @ 1%
in N/mm	60
Standard Tension	.50%
Min. Pulley	3.94"
Min. Back Flex	5.9"
Weight	.98 Lbs/SF
Product Operational Temp. Range	14° to 140° F
Hardness	90 Duro Shore A
Max. Width	1.77"

### Material Construction

#### Conveying Surface

Compound	Polyurethane
Cover Surface	Texture
Color	Blue

#### Underside

Fabric	Aramid
Bottom Surface	Fabric
Coefficient of Friction	.50

### Standard Fabrications

Longitudinal Splice	No
Guide Applied to Cover	No
Sidewalls	No
Edge Capped	No
Cleats	No
Guide Applied to Bottom	No
Mechanical Lacing	No

### Features

FDA	No
Anti-Microbial	No
Anti-Static	No
Flame Retardant	No
Cross Rigid	Yes
Troughing	No
Curve Belt Compatible	No

# SLR 60

## 04-006 | Splicing Instructions

### Aero Press Settings

Pressure	2 bars
Temp. Top	185° C
Temp. Bottom	185° C
Dwell Time	20 minutes
Foil Position	None
Foil	None
Release Top	None
Release Bottom	None

### Nitta NPS-2005-1B Press Settings

Pressure	2 bars
Temp. Top	185° C
Temp. Bottom	185° C
Dwell Time	18 minutes
Foil Position	None
Foil	None
Release Top	None
Release Bottom	None

## Compatible Splices

### Endless Splices

Step Splice	No
Straight Finger	Yes
Split Finger	No
Bias Finger	No
Skive	No
Finger Over Step	No
Step Over Finger	No
Electrode	No
Butt Weld	No
Lock Lap	No

### Mechanical Splices

Clipper	No
Alligator	No
Staple	No
Minet	No
Plastic Spiral	No
Plastic Rivet	No
Plastic Hinge	No
Super Screw	No
Bolt Hinge	No
Rivet Hinge	No

### Sparks Specialty Splices

Hidden	No
Hybrid	No
Trailing Flap	No
VT	No
Hybrid VT	No
7/11	No
Urethane Top	No
Urethane Bottom	No
Urethane Splash	No